



OSA-06 Oil Smart® Alarm Panel and Electric Junction Box

The Oil Smart® Alarm System is a leak/high liquid alarm that differentiates between oil and water. The system is complete with visible mounted features and dry contacts for remote monitoring. The alarm will activate with the presence of any liquid/substance and will identify if oil or water is present.

SPECIFICATION:

Voltage: 120VAC primary, 60 Hz. Available in 240VAC 50/60Hz.

Enclosure: Type 4X non-metallic.

External Dimensions: 6"x6"x 4". Color Gray

Material 94V-2 Polycarbonate, IP-56 Rating.

FEATURES:

External mounting feet for quick installation to any flat surface.

Test and silence buttons; alarm automatically resets.

- Red beacon alarm light
- High 85 decibel audible alarm and dry contact
- Oil present yellow light and dry contact
- Water present white light and dry contact
- Easy accessible terminal blocks
- Liquid Smart alarm switch 20' cord; available up to 200' cord
- Silence switch and test switch
- Mounting hardware included

The SEEWATER Alarm system is triggered by the Liquid Smart sensor. Alarms are equipped with both visual and audible signals. The Liquid Smart alarm sensor will activate the alarm and indicator lights under the following condition: A high liquid level, the SEEWATER® Alarm will differentiate and indicate if oil (amber light) or water is present (white light).



www.seewaterinc.com
or www.oilsmart.org

951.487.8073 • 888.733.9283


Email: info@seewaterinc.com

121 North Dillon Street • San Jacinto, CA 92583
P.O. Box 1269 • San Jacinto, CA 92581


Fail-Safe Technology since 1995.

SEEWATER Inc. 
"OIL SMART" Water Pump Switches

Wiring Diagram
 Model # OSA-06

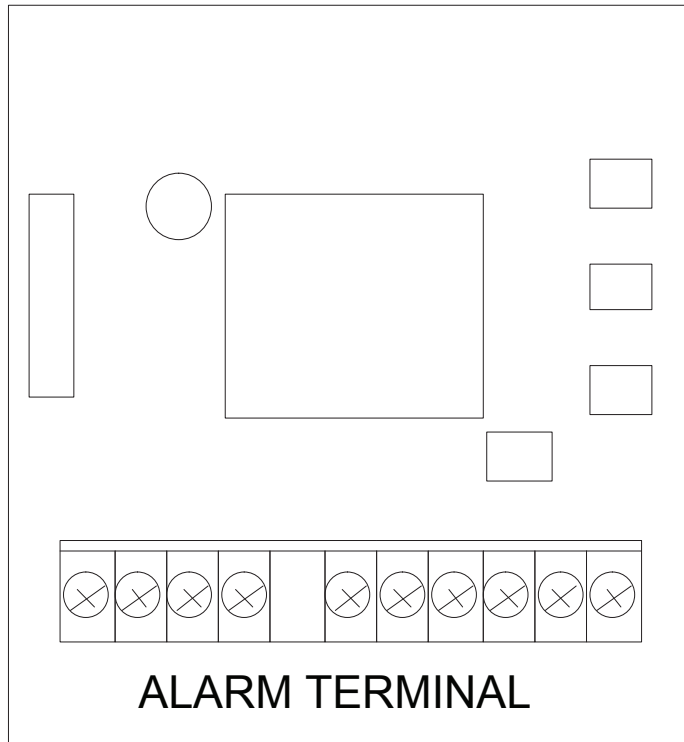

ALARM TERMINAL

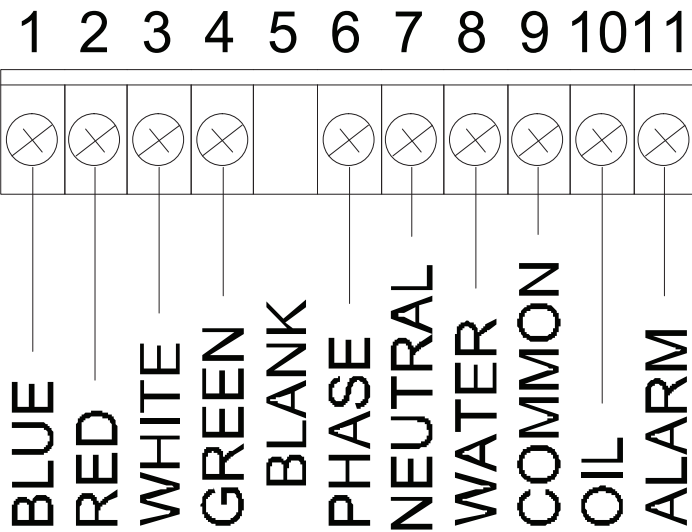

[LIQUID SMART ALARM SWITCH] [120 V] [DRY CONTACTS]

www.seewaterinc.com or www.oilsmart.org
 951.487.8073 • 888.733.9283 • Email: info@seewaterinc.com
 121 North Dillon Street • San Jacinto, CA 92583
 P.O. Box 1269 • San Jacinto, CA 92581



Liquid Smart® Alarm Switch

Overview

The Liquid Smart® Alarm Switch is a combination of capacitive and optic technology. The switch will activate the Oil Smart® Alarm with the presence of any liquid and simultaneously identify if oil or water is present. The alarm is a solid-state, low amp alarm circuit.


Liquid Smart® Specifications

Dimensions: 3" High x 1.5" Wide x 1.5" Deep

Voltage: 12VDC

Enclosure: Constructed of high impact injected molded plastic

Wire: Insulation-PVC, PE with Bylon rip cord, 18 AWG, UL listed for Direct Burial

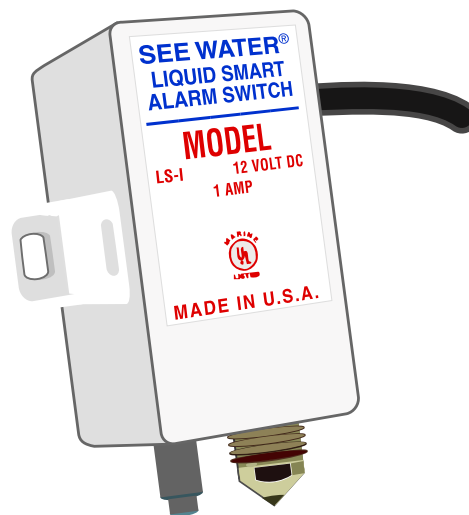

www.seewaterinc.com or www.oilsmart.org
951.487.8073 • 888.733.9283 • Email: info@seewaterinc.com
121 North Dillon Street • San Jacinto, CA 92583
P.O. Box 1269 • San Jacinto, CA 92581

Rev 1 (1m/07-07) Printed in U.S.A.

Fail-Safe Technology since 1995.
SEE WATER[®] *inc.*
"OIL SMART" Water Pump Switches