

DIAL-A-TIME PUMP SWITCH

Overview:

The adjustable pump run time switch is designed for use in general dewatering, wastewater and confined space pumping applications. The Dial-a-Time® is equipped with a 10 position dial that allows the pumping range to be adjusted for the specific need of the job.

Features:

- Limitless pumping range
- Directly controls sewage and sump pumps 0 to 1hp (piggyback): Quick installation
- Compatible with WS Series sewage pump panels
- 10 position dial to select pump run time
- No moving parts
- Sensors (316 stainless) resistant to contamination
- UL Listed and CE Certified



Applications:

- General dewatering
- Wastewater
- Confined space pumping
- Large tanks



Your Trusted Source for Quality Control Panels.®

DIAL-A-TIME PUMP SWITCH

Single Phase:

Models	Voltage	Pump FLA
A120P	120VAC	16 FLA
A120	120VAC	16 FLA
A240	230VAC	8 FLA

Adjustable Timer Guide:


1.	3 seconds	6.	1 minute 40 seconds
2.	6 seconds	7.	3 minute 20 seconds
3.	12 seconds	8.	13 minute 20 seconds
4.	24 seconds	9.	26 minute 40 seconds
5.	48 seconds	10.	53 minute 20 seconds

Technical Specifications:

- Sensor: 316 stainless steel sensors
- Plastic: Type 3R high impact resistance injected plastic
- Standard Temperature Operating Range: -33° to 170°
- IP Dial: IP66, IP68 rated
- Stand by current: 004 amps
- UL 508A, magnetic motor control
- UL Certified, file E183129, CE Certified
- 20' SJTOW 12 AWG wire

Typical Installation of Dial-A-Time® Pump Switch

- ① Dial-A-Time® Pump Switch
- ② Submersible Pump #1

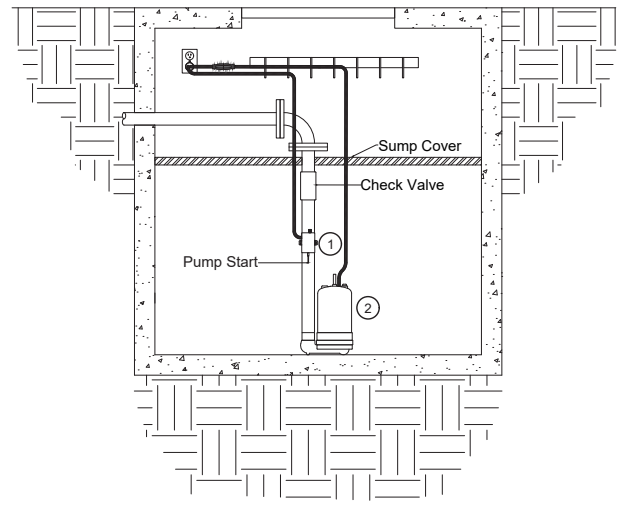

www.seewaterinc.com
951.487.8073 • 888.733.9283 • info@seewaterinc.com
22220 Opportunity Way, Suite 101 • Riverside, CA 92518

SEEWATER
Inc.
Your Trusted Source for Quality Control Panels.