

Knight Series® FC-40 Level and Temperature Alarm System

Overview:

The FC-40 monitors cisterns or reservoirs that supply water for a building's fire sprinkler system and water containment tanks. It provides continuous level and temperature information on the panel and dry contacts that connect to the fire panel monitoring system. The FC-40 is ideal for applications where there is a risk of freezing temperatures. The alarm and monitoring features provided meet fire codes and standards for cisterns


Features:

- UL Listed for the United States and Canada
- System indicates in the event of temperature below 40°F, low liquid level, or power loss
- Complete panel remote monitoring dry contacts (below 40°F, low level or power loss) that are able to connect to fire panel or building management systems.
- Temperature monitoring LCD display with adjustable alarm settings
- Includes stainless steel temperature sensor
- Includes low level float with 20' SJOW cord and mounting clamp
- Battery backup in the event of power loss
- Panel enclosure: NEMA 4X polycarbonate enclosure with clear front and lockable latch
- System has adjustable temperature set points



Applications:

- Cisterns/Tanks
- Fire sprinkler systems
- Applications that require level and temperature monitoring
- Above and below ground containment tanks



Your Trusted Source for Quality Control Panels.®


Knight Series® FC-40 Alarm System

Single Phase: 120/240VAC

Models	Voltage	Hz.
FC-40	120VAC	60 Hz.
FC-40-A	208/240VAC	50/60 Hz.

Custom Options:

- PC = 10' power cord
- HH = High level alarm circuit
- C = Additional cord length greater than 20':
Specify after C. Example: (FC-40-C50) indicates
50' cable length for low level narrow angle
float and temperature sensor. require level and
temperature monitoring

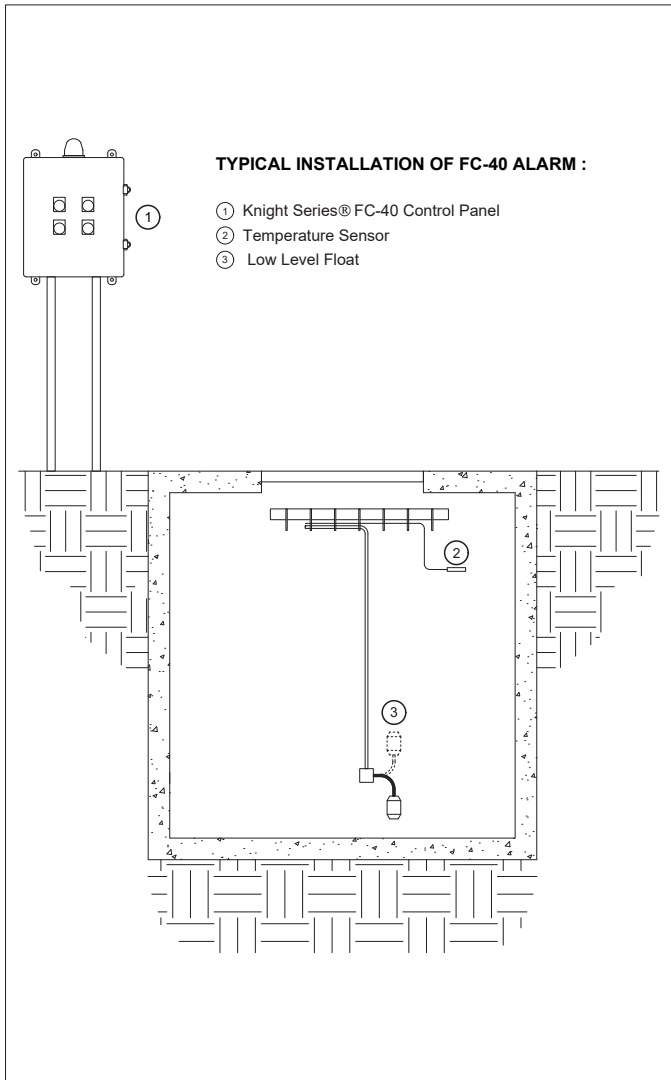

www.seewaterinc.com
951.487.8073 • 888.733.9283 • info@seewaterinc.com
22220 Opportunity Way, Suite 101 • Riverside, CA 92518

SEEWATER[®]
Inc.

Your Trusted Source for Quality Control Panels.[®]