

OIL SMART® SIMPLEX CONTROL PANELS

Overview:

The Oil Smart® simplex control panels will control a 120/208/240V single phase or a 208/240/480V three phase pump in elevator sumps, transformer containment areas, and any application where there is a need to remove water while containing oil. See Water simplex control panels come standard with a clear front NEMA 4X rated enclosure, Oil Smart® components, an IEC rated contactor, and a motor protective switch. All panels are UL listed for the United States and Canada, and come with a five year warranty.


Features:

- Panel and controls: UL listed for the United States and Canada
- Panel enclosure: Heavy duty polycarbonate indoor/outdoor NEMA 4X rated with lockable latches
- Pump control visible indicators: pump hand-off-auto (H.O.A.) switch, green pump run light, red pump fault light, and green power on light
- Alarm visible indicators: red beacon alarm light, yellow light for oil, white light for water, alarm test and silence buttons
- Alarm horn sounds at 85 decibels at 10 feet
- Remote monitoring dry contacts: oil, water, high liquid, pump run, and pump fault
- Upgraded pump protection: motor protective switch (branch circuit protection, adjustable overload and disconnect), and a thermal cutout with indicator.



Applications:

- Elevator sumps
- Electric utilities (substations, power plants, underground vaults, and transformer barriers)
- Manufacturing facilities
- Any application where there is a need to remove water while containing oil

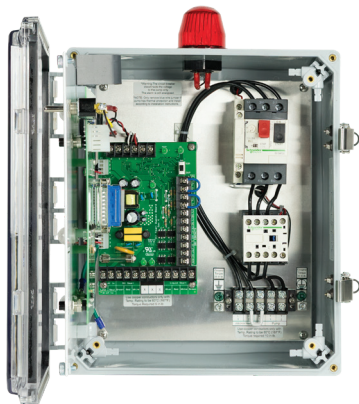

OIL SMART® SIMPLEX CONTROL PANELS

Simplex Single Phase: 120/208/240VAC

Models	Pump Full Load Amp Rating
OSSIM-TP-1001	0-7.0 FLA
OSSIM-TP-1002	7.0-15.0 FLA
OSSIM-TP-1003	15.0-22.0 FLA
OSSIM-TP-1004	22.0-28.0 FLA

Note: Thermal overload protection is generally provided in single phase pumps. To request a specific overload on the Oil Smart® Single Phase Models, contact the factory. Each panel includes a motor protector switch that will provide accurate pump circuit breaker protection.

Simplex Three Phase: 208/240/480VAC

Models	Pump Full Load Amp Rating
OSSIM-TP-3001	1.0-1.6 FLA
OSSIM-TP-3002	1.6-2.5 FLA
OSSIM-TP-3003	2.5-4.0 FLA
OSSIM-TP-3004	4.0-6.3 FLA
OSSIM-TP-3005	6.0-10.0 FLA
OSSIM-TP-3006	9.0-14.0 FLA
OSSIM-TP-3007	13.0-18.0 FLA
OSSIM-TP-3008	17.0-23.0 FLA
OSSIM-TP-3009	20.0-25.0 FLA
OSSIM-TP-3010	24.0-32.0 FLA


Custom Options:

- AF = Alarm flasher
- SF = Seal Failure Circuit w/ indicator light
- ET = Elapsed Time Meter w/ LCD display & reset
- CC = Cycle Counter w/ LCD display & rest
- MD = Main Disconnect
- LA = Lightning secondary surge arrestor
- AH = Anti-Condensation Heater
- S3 = No sensors included
- C = Additional cord length greater than 20' specify after C. example: (OSSIM-TP-3003-C50) indicates 50' cord lengths for all components

Operation of Liquid Smart®



High Water Level

When water comes in contact with both sensors, the white water indicator on the front panel will illuminate. This condition will turn on the red beacon alarm light and sound the alarm buzzer.



High Oil Level


If oil comes in contact with both sensors, the yellow oil indicator on the front panel will illuminate. This condition will turn on the red beacon alarm light and sound the alarm buzzer.

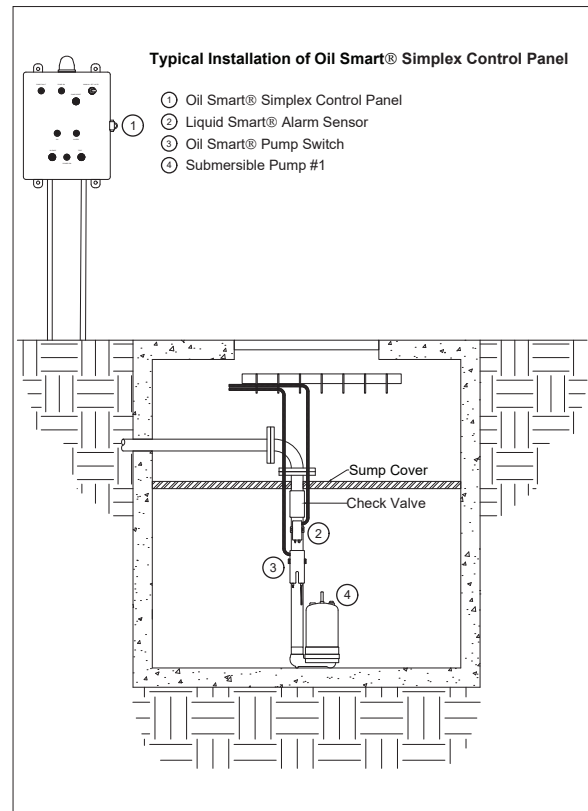

Operation of Oil Smart®


Normal Condition (Water Only)

When water comes in contact with the short (on) sensor, the pump will turn on. The pump will remain on until water clears the long (off) sensor.




Oil Present Condition

If oil comes in contact with the (on) sensor, the pump will not turn on.



Water (Oil Present Condition)

If the water level rises enough to contact the (on) sensor under the oil layer, the pump will turn on and remain on until the (off)



www.seewaterinc.com

951.487.8073 • 888.733.9283 • info@seewaterinc.com
22220 Opportunity Way, Suite 101 • Riverside, CA 92518

SEEWATER
Inc.
Your Trusted Source for Quality Control Panels.