

WS Series® Triplex Control Panels

Overview:

The WS Series® Triplex control panels are ideal for sewage pump chambers, grinder pumps, sump pump basins, and lift stations. Features include the ability to choose jockey pump rotation or standard triplex mode, three pump high demand, and a low/high liquid alarm. See Water® Triplex control panels come standard with a clear front NEMA 4X enclosure with three-point locking latch, main disconnect, H.O.A. switches, green pump run lights, red pump fault lights, and remote monitoring dry contacts for high liquid, pump run(s), and pump faults(s).

Features:

- Designed to control three 208/240/480VAC pumps in sewage dewatering applications
- NEMA 4X polycarbonate enclosure with three-point locking latch
- Pump control visible indicators: 22mm pump hand-off-auto (H.O.A.) switches for pump #1, pump #2, and pump #3, green pump run lights, red pump fault lights with reset button, and green power on light
- Alarm visible indicators: red beacon alarm light, alarm test and silence buttons
- Alarm horn sounds at 85 decibels at 10'
- Remote monitoring dry contacts: low liquid, high liquid, pump #1 fault, pump #2 fault, pump #3 fault, pump #1 run, pump #2 run, pump #3 run (normally open)
- Pump protection: motor protective switch included for all pumps (branch circuit protection, adjustable overload and disconnect), pump thermal cutout circuit
- Includes 6 floats: 5 narrow angle N/O float switches with 20' cords and mounting hardware, and 1 low level narrow angle N/C float switch with 20' cord
- Float status indicators (low level, stop, lead, lag, lag/lag, and high liquid)
- UL Listed for the United States and Canada



Applications:

- Sewage Pump Chambers, Grinder Pumps, Sump Pump Basins, and Lift Stations



Your Trusted Source for Quality Control Panels.®

WS Series® Triplex Control Panels

Triplex Three Phase: 208/240/480VAC


Models	Pump Full Load Amp Rating
WT3P-6-1	1.0-1.6 FLA
WT3P-6-2	1.6-2.5 FLA
WT3P-6-3	2.4-4.0 FLA
WT3P-6-4	4.0-6.3 FLA
WT3P-6-5	6.0-10.0 FLA
WT3P-6-6	9.0-14.0 FLA
WT3P-6-7	13.0-18.0 FLA
WT3P-6-8	17.0-23.0 FLA
WT3P-6-9	20.0-25.0 FLA
WT3P-6-10	24.0-32.0 FLA

Standard Configuration:

1. WS Series® Triplex control panel
2. High liquid alarm float
3. Lag/lag pump float
4. Lag pump float
5. Lead pump float
6. Stop float
7. Low level float
8. Submersible pump #1
9. Submersible pump #2
10. Submersible pump #3

Custom Options:

- AF = Alarm Flasher
SFT = Seal Failure Circuit w/ indicator light
ETT = Elapsed Time Meter w/ LCD display & reset
CCT = Cycle Counter w/ LCD display & reset
LA = Lightning Secondary Surge Arrestor
S3 = No floats included
AH = Anti Condensation Heater
IST = Intrinsically safe
C = Additional cord length greater than 20':
Specify after C. Example: (WT3P-6-5-C50)
Indicates 50' cord lengths for all floats

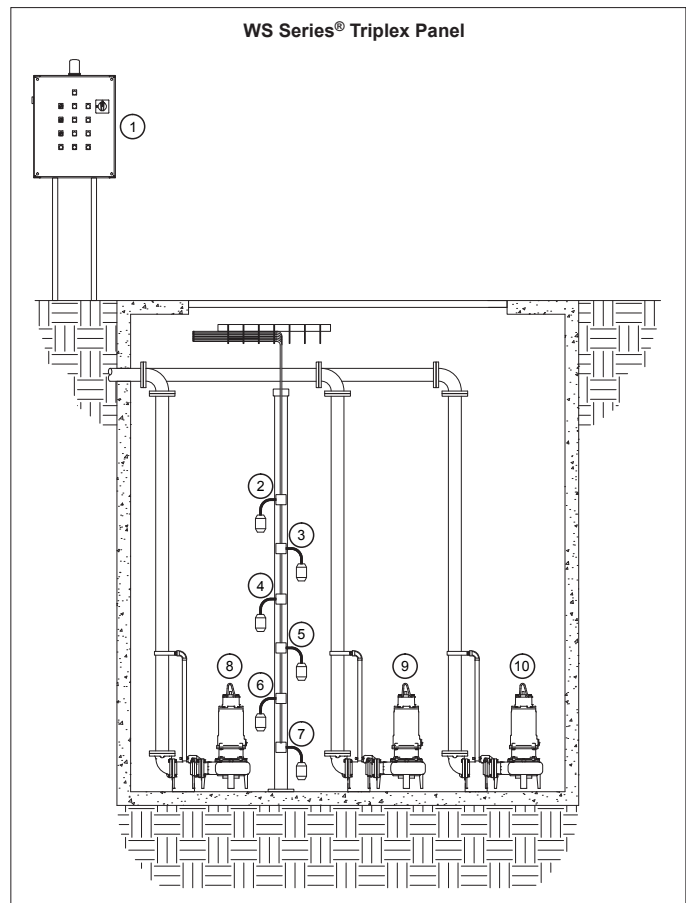

www.seewaterinc.com
951.487.8073 • 888.733.9283 • info@seewaterinc.com
22220 Opportunity Way, Suite 101 • Riverside, CA 92518

SEEWATER
Inc.
Your Trusted Source for Quality Control Panels.