

Oil Smart® Duplex Control Panels

The Oil Smart® duplex control panels will control two 120/208/240V single phase or two 208/240/480V three phase pumps in elevator sumps, transformer containment areas, and any application where there is a need to remove water while containing oil. See Water duplex control panels come standard with a clear front NEMA 4X rated enclosure. Oil Smart® components, IEC rated contactors, and motor protective switches. All panels are UL listed for the United States and Canada, and come with a five-year warranty.





Features

- Panel and controls: UL listed for the United States and Canada
- Panel enclosure: Heavy duty polycarbonate indoor/ outdoor NEMA 4X rated with lockable latches
- Pump control visible indicators: Pump hand-off-auto (H.O.A.) switches, green Pump Run lights, red Pump Fault lights, and green Power On light
- Alarm visible indicators: Red beacon alarm light, yellow light for oil, white light for water, alarm test and silence buttons
- Alarm horn sounds at 85 decibels at 10 feet
- Duplex provides: Two-pump alternation and high-demand two-pump operation
- Remote monitoring dry contacts: Oil, Water, High liquid, Pump Run(s), Pump #1 Fault, and Pump #2 Fault
- Upgraded pump protection: Motor protective switches included for both pumps (branch circuit protection, adjustable overload and disconnect) and thermal cutout with indicators

Call us toll-free at 888.733.9283 to speak with one of our expert Sales Engineers.

Applications

- Elevator sumps
- Electric utilities (substations, power plants, underground vaults, and transformer barriers)
- Manufacturing facilities
- Any application where there is a need to remove water while containing oil







951.487.8073 / 888.733.9283

www.seewaterinc.com


sales@seewaterinc.com



Oil Smart® Duplex Control Panels

Duplex Single Phase: 120/208/240VAC Duplex Three Phase: 208/240/480VAC

| Models | Pump FLA | Models | Pump FLA |
|---|---------------|------------|---------------|
| OSD1P-1021 | 0-7.0 FLA | OSD3P-3021 | 1.0-1.6 FLA |
| OSD1P-1022 | 7.0-15.0 FLA | OSD3P-3022 | 1.6-2.5 FLA |
| OSD1P-1023 | 15.0-22.0 FLA | OSD3P-3023 | 2.5-4.0 FLA |
| OSD1P-1024 | 22.0-28.0 FLA | OSD3P-3024 | 4.0-6.3 FLA |
| OSD1P-1025 | 28.0-36.0 FLA | OSD3P-3025 | 6.0-10.0 FLA |
| *Note: Thermal overload protection is generally provided in single phase pumps. To request a specific overload on the Oil Smart® single phase models, contact the factory. Each panel includes motor protector switches that will provide accurate pump circuit breaker protection. | | OSD3P-3026 | 9.0-14.0 FLA |
| | | OSD3P-3027 | 13.0-18.0 FLA |
| | | OSD3P-3028 | 17.0-23.0 FLA |
| | | OSD3P-3029 | 20.0-25.0 FLA |
| | | OSD3P-3030 | 24.0-32.0 FLA |

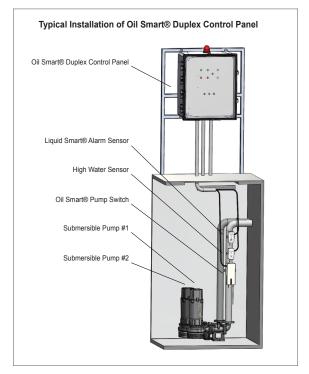



Custom Options

| Option(s) | Description |
|---------------|--|
| 24 | Pump Exerciser - Auto Cycles Pump(s) Daily, Weekly or Monthly |
| 28 | Power On Dry Contact |
| 3R | Painted Steel Enclosure |
| 6P | Upgraded Enclosure (NEMA 6P Rated); Removes Buzzer and Beacon |
| AF | Alarm Flasher |
| AH | Anti-Condensation Heater |
| С | Additional Cord Length Greater than 20'* |
| CCD | Cycle Counter w/ LCD Display and Reset |
| ETD | Elapsed Time Meter w/ LCD Display and Reset |
| LAD/LAW | Lightning Secondary Surge Arrestor |
| MD | Main Disconnect |
| PM | Phase Monitoring |
| PX | Pump Portal® Wireless Remote System Monitoring |
| S3 | No Sensors Included |
| SFD | Seal Failure Circuit w/ Indicator Lights |
| SS4 | Upgraded Enclosure (304 Stainless Steel) |
| SS6 | Upgraded Enclosure (316 Stainless Steel) |
| *Additional c | ord length greater than 20'. Specify after C. Example: (OSD1P-1021-C50). |

www.seewaterinc.com

sales@seewaterinc.com

Operation of Oil Smart®

Normal Condition (Water Only)


When water comes in contact with the short (on) sensor, the pump will turn on. The pump will remain on until water clears the long (off) sensor.

Oil Present Condition

If oil comes in contact with the (on) sensor, the pump will not turn on.

Water (Oil Present Condition)

If the water level rises enough to contact the (on) sensor under the oil layer, the pump will turn on and remain on until the (off) sensor clears of water.



Operation of Liquid Smart®

High Water Level

When water comes in contact will both sensors, the white water indicator on the front panel will illuminate. This condition will turn on the red beacon alarm light and sound the alarm buzzer.



High Oil Level

If oil comes in contact with both sensors, the yellow oil indicator on the front panel will illuminate. This condition will turn on the red beacon alarm light and sound the alarm buzzer.



See Water, Inc. | 22220 Opportunity Way, Suite 101 | Riverside, CA 92518 © 2021 See Water, Inc. All rights reserved.

Indicates 50' cord lengths for all components.

951.487.8073 / 888.733.9283

c (UL)us