

SIMPLE SIMPLEX® CONTROL PANELS

Overview:

The Simple Simplex® Control Panels will alert of a high liquid level and are designed to control a single phase pump. Applications include sewage pump chambers, sump pump basins, lift stations, and onsite installations. The controls are housed in a 8"x 6"x 4" NEMA 4X indoor/outdoor polycarbonate enclosure and UL listed in the United States and Canada.

Simple Simplex® 1:

The Simple Simplex® 1 will alert of a high liquid level and control a 120/208/240V single phase pump. Models are available in 2 or 3 float operation.

Features:

- NEMA 4X enclosure with lockable latch
- Red beacon LED alarm light
- Alarm horn sounds at 85 decibels at 10'
- Alarm test and silence buttons with automatic reset
- Pump control relay - 16FLA rating
- Alarm fuse

Models:

- SSP-1 = 2 float operation
- SSP-1-3 = 3 float operation

Simple Simplex® 2:

The Simple Simplex® 2 will alert of a high liquid level and control a 120/208/240 single phase pump. The system includes an (HOA) Hand-Off-Auto toggle switch, green pump light, and high liquid alarm dry contacts. Models are available in 2 or 3 float operation.

Features:


- NEMA 4X enclosure with lockable latch
- Red beacon LED alarm light
- Alarm horn sounds at 85 decibels at 10'
- Alarm test and silence buttons with automatic reset
- (H.O.A.) Hand-Off-Auto toggle switch and green pump run light
- Pump control relay - 16FLA rating
- Alarm fuse
- High liquid alarm dry contacts

Models:

- SSP-2 = 2 float operation
- SSP-2-3 = 3 float operation



*SSP-2-PA-KIT

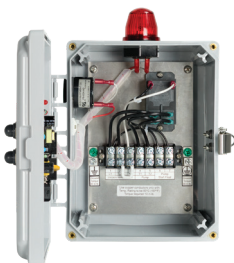

Your Trusted Source for Quality Control Panels.®

SIMPLE SIMPLEX® CONTROL PANELS

Simple Simplex® 3:

The Simple Simplex® 3 plunger control panel will alert of a high liquid level and includes a 120V receptacle for quick and easy installation of the pump/pump switch.

Features:

- NEMA 4X enclosure with lockable latch
- Red beacon LED alarm light
- Alarm horn sounds at 85 decibels at 10'
- Alarm test and silence buttons with automatic reset
- 120V receptacle for pump/pump switch
- Pump control relay - 16FLA rating
- High liquid alarm dry contacts
- Alarm fuse

Models:



SSP-2 = 2 float operation
SSP-2-3 = 3 float operation

Custom Options:

- S3 = No floats included
HH = High high level alarm
LL = Low level alarm
BB = 9V battery backup for alarm circuit
AF = Alarm flasher
C = Additional cord length greater than 20'
Specify after C. example: (SSP-1-C50)
indicates 50' cord lengths for all components

Optional Accessories:

- PA-KIT = Pedestal assembly post junction box kit
95-28 = Mechanically activated wide angle float switch, controls pumps up to 1/2 HP at 120V

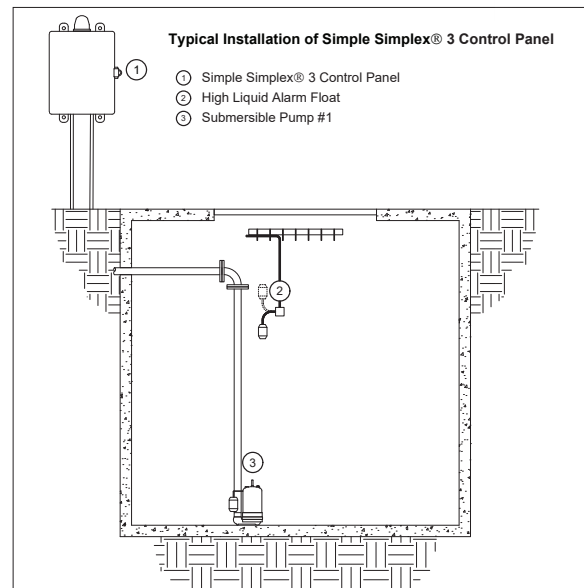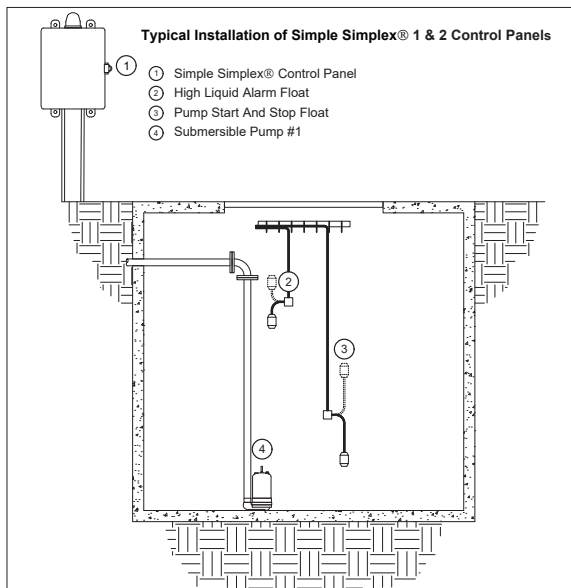

www.seewaterinc.com
951.487.8073 • 888.733.9283 • info@seewaterinc.com
22220 Opportunity Way, Suite 101 • Riverside, CA 92518

